

# AQUABION®

## Galvanic Water Treatment

### Without chemicals or external power supply




water treatment  
worldwide

## Technical sheet

# AQUABION® AB-H32



Pressure drop at type AB-H32

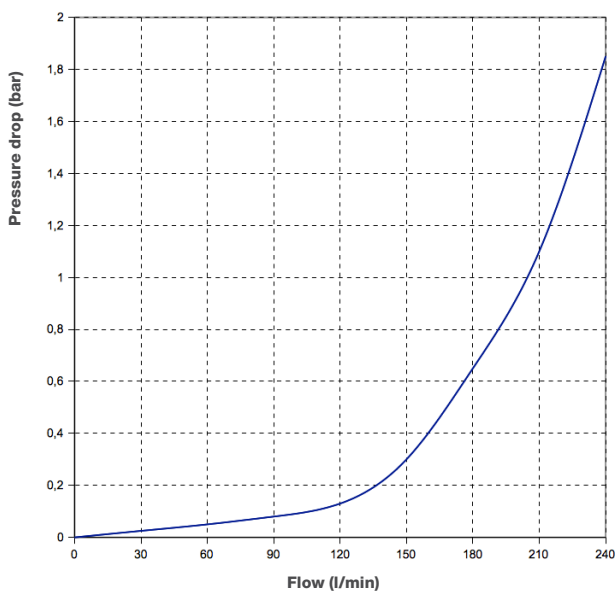

<b>Internal diameter</b>	<b>1 1/4" DN32</b>
Connection	female
Length	330 mm
Body diameter	65 mm
Weight	4,81 kg
Maximum pressure	16 bar
Nominal flow at 2m/s	7,0 m <sup>3</sup> /h
Pressure drop at nominal flow	0,16 bar

Material	Body	CuZn39Pb3 (2.0401)
Internal parts	Zinc anode	Zn2 DIN EN 1179
	Swirling body	1.4301
	Sealing ring	PTFE
Construction	The body of the device consists of a single sleeve with two threaded nipples	
Temperatures of use	Warm water:	
	- stored	85°C
	- circulating	85°C

**IMPORTANT:** AQUABION® must be installed in metal or plastic piping with metal piping before and after AQUABION® and with equipotential bonding.

